

## Art. GAV140


### Geradsitz-Absperrventil

PN 40

### Globe valve

Werkstoffe / materials		Auf Anfrage	On request
Gehäuse/Body	GS-C25 / Cast steel	- Regulierkegel	- Regulation-disc
Spindel/Stem	X20Cr13 / Stainless steel	- Rückschlagkegel	- Stop-check
Sitze/Seats	X20Cr13 / Stainless steel	- Hubanzeige	- Position-indicator
		- PN 16 gebohrt	- PN 16 drilled

DN ≥ 125 mit Entlastungskegel / DN ≥ 125 with incorporated by-pass  
 Betriebstemperatur/Temperature max. 400°C

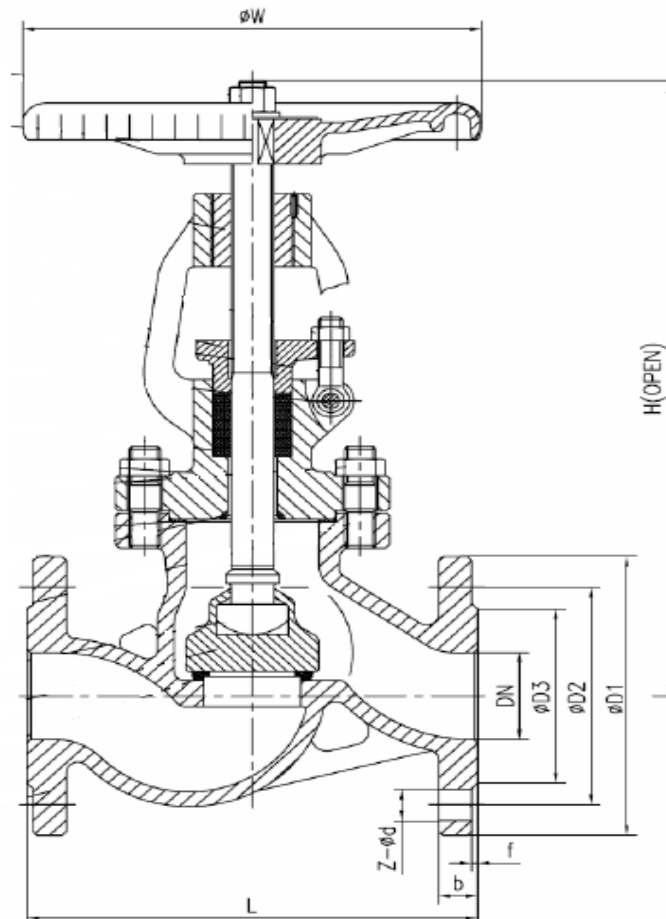

### Maße / sizes

DN	D3	D2	D1	f	b	Z-Ød	H	W	L
15	45	65	95	2	16	4-Ø14	210	120	130
20	58	75	105	2	18	4-Ø14	230	120	150
25	68	85	115	2	18	4-Ø14	250	140	160
32	78	100	140	2	18	4-Ø18	275	160	180
40	88	110	150	3	18	4-Ø18	300	180	200
50	102	125	165	3	20	4-Ø18	325	200	230
65	122	145	185	3	22	8-Ø18	385	220	290
80	138	160	200	3	24	8-Ø18	410	250	310
100	162	190	235	3	24	8-Ø22	455	300	350
125	188	220	270	3	26	8-Ø26	510	350	400
150	218	250	300	3	28	8-Ø26	560	400	480