

Art. RKA116

Flanschen-Rückschlagklappe

- innenliegende Welle

PN 10 / 16

Swing-check-valve

- inside shaft


Werkstoffe / materials	Auf Anfrage	On request
Gehäuse/Body GG-25	- Gu/Ni-dichtend	- Rubber/stainless-steel
Welle/Shaft Messing/Brass	- Gu/Ms-dichtend	- Rubber/brass
Sitze/Seats Messing-Messing/Brass-Brass	- Umführung	- By-pass
	- PN10 gebohrt	- PN10 drilled

Armatur gem. DGRL 97/23/EG und AD 2000 A4/W5 / Valves acc. PED 97/23/EC and AD 2000 A4/W5

Baulänge: EN 558-1 Gr. 48 / Face-to-face: EN 558-1 Gr. 48

Flanschanschluß: EN1092-1 Form B1 / Flanged ends: EN1092-1 Form B1

Betriebstemperatur/Temperature max. 150°C

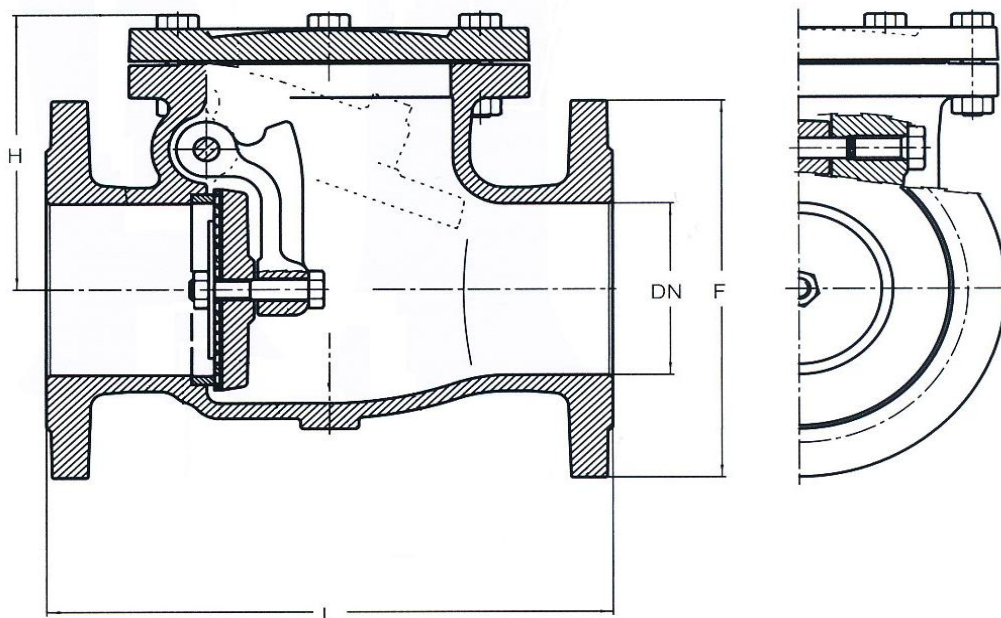

Maße / sizes

DN	F	L	H	Kg
40	150	180	115	9
50	165	200	125	10
65	185	240	130	15
80	200	260	140	20
100	220	300	160	26
125	250	350	180	36
150	285	400	200	50
200	340	500	220	73
250	405	600	290	134
300	460	700	330	199